



NOVA PRO SCALA DRAWER SYSTEM

The new generation.
Inspiration in the right angle.
Simple. Clear. Timeless.



More glass. More height. More space.
Alongside the familiar Crystal and railing options, the Nova Pro Scala range also includes a high glass version and a drawer side in height 186 mm.

G*GRASS®

Nova Pro Scala incorporates the best of Nova Pro. And much more besides!

Elegant edge definition is a striking feature of Nova Pro Scala. The broad spectrum covered by the product range enables segmentation from the entry-level version through to the premium segment and provides the individual styling option of designer panels which fit snugly on the drawer sides.

www.grass.eu




DRAWER SLIDES – GRASS

CONCEALED FULL EXT. SOFT CLOSE DRAWER SLIDES

GRASS DYNAPRO FULL EXTENSION DRAWER SLIDES SOFT CLOSE 40/70KG

- Full extension drawer, synchronised 40 kg or 70 kg load capacity
- Soft-close damping system
- Stepless self-locking of the drawer when placed on the slide
- Integrated, tool-free 3-dimensional adjustment
 - height adjustment + 3.5 mm
 - side adjustment ± 1.5 mm
 - tilt angle adjustment + 4 mm

DYNAPRO SOFT-CLOSE FULL EXTENSION DRAWER SLIDES




LOCKING DEVICE AND ADJUSTMENT ADAPTER IN THE SET,
CONSISTING OF ITEMS A AND B




NL	40 KG	70 KG
270	F130107793204	
300	F130107796204	
350	F130107802204	
400	F130107808204	
450	F130107814204	F130107832204
500	F130107820204	F130107838204
550	F130107826204	F130107844204
600		F130107850204
650		


ITEM NO.
008810

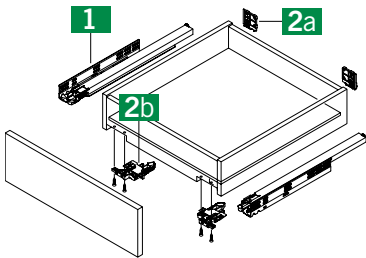

4-SIDED DRAWER

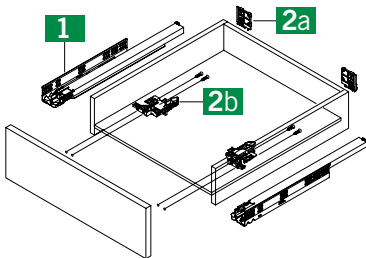

3-SIDED DRAWER

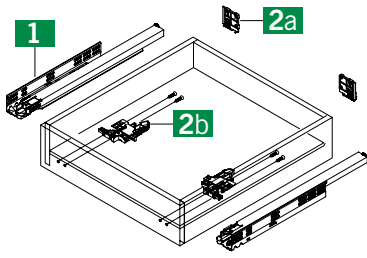


INSET DRAWER




GRASS DYNAPRO FULL EXTENSION DRAWER SLIDES SOFT CLOSE 40/60KG


INSTALLATION INFORMATION
INSTALLATION DIMENSIONS

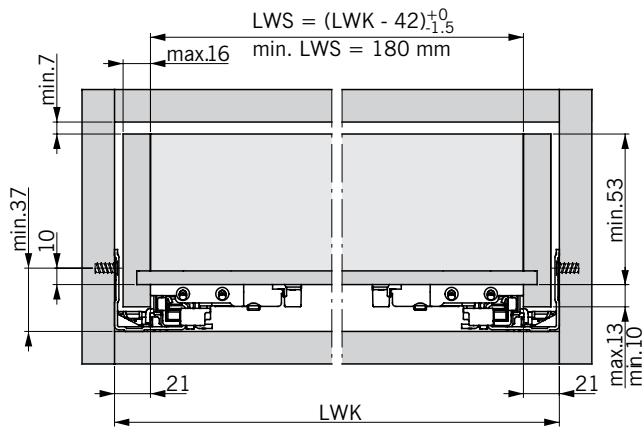

DRAWER




INSET DRAWER




All dimensions in millimetres

NL	SKL	MET
250	240	253
270	260	273
300	290	303
320	310	323
350	340	353
380	370	383
400	390	403
420	410	423
450	440	453
480	470	483
500	490	503
520	510	523
550	540	553
580	570	583
600	590	603
650	640	653
700	690	703
750	740	753

LOCKING DEVICE FIXING POSITION

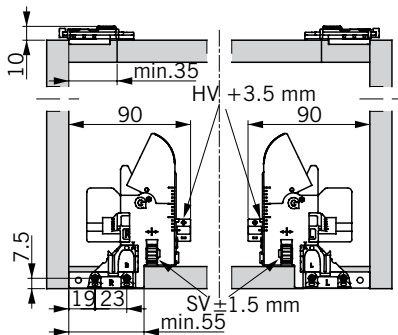


ADJUSTMENT ADAPTER FIXING POSITION

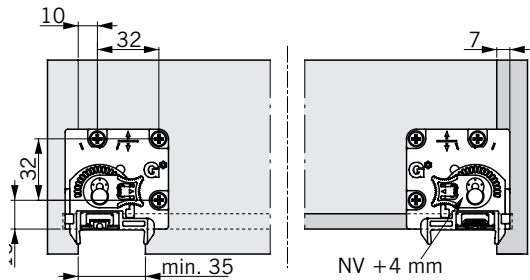


LEGEND

HV	Height adjustment
KV	Front edge of cabinet
LWK	Inside cabinet width
LWS	Internal drawer width
MET	Minimum installation depth
NL	Nominal length
NV	Tilt angle adjustment
SKL	Length of drawer
SV	Side adjustment

FIXING POSITIONS FOR FULL EXTENSION DRAWER SLIDES

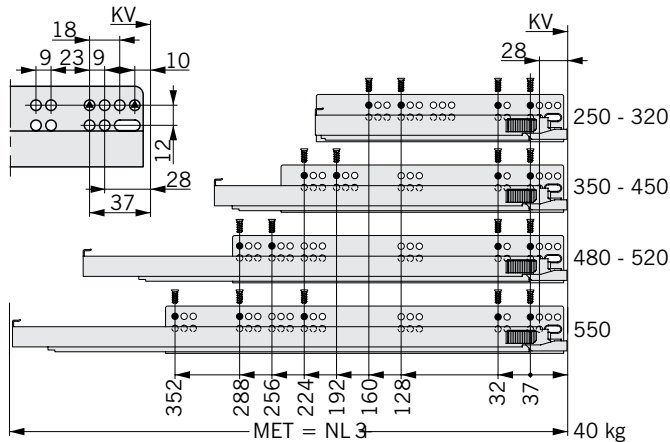

SPECIAL EURO SCREW Ø 6.3 X 14 MM
 CHIPBOARD SCREW Ø 3.5 X 15 MM

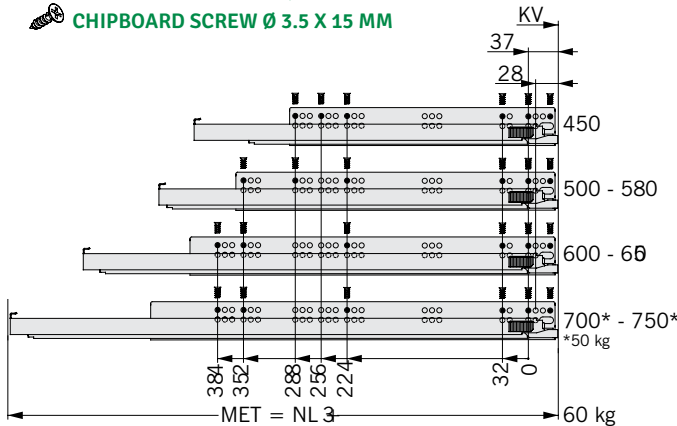

DRAWER SLIDES – GRASS


CONCEALED FULL EXT. PUSH DRAWER SLIDES

GRASS DYNAPRO FULL EXTENSION DRAWER TIPMATIC 40KG

- Full extension drawer, synchronised 40 kg load capacity
- Tipmatic automatic ejection mechanism
- Stepless self-locking of the drawer when placed on the slide
- Integrated, tool-free 3-dimensional adjustment
 - height adjustment + 3.5 mm
 - side adjustment ± 1.5 mm
 - tilt angle adjustment + 4 mm
 - front gap adjustment ± 1.5 mm
- **Tipmatic function:**
 - Can be triggered by gently tapping anywhere on the surface of the front
 - Drawer extends fully to allow optimal access to contents
 - Reliable closing through catch function
 - Depth adjustment on both sides ensures precise front gap adjustment



DYNAPRO TIPMATIC FULL EXTENSION DRAWER



NL	40 KG
250	008925
300	008930
350	008935
400	008940
450	008945
500	008950
550	008955

LOCKING DEVICE AND ADJUSTMENT ADAPTER IN THE SET,
CONSISTING OF ITEMS A AND B




ITEM NO.
008810

SYNCHRONISATION MODULE AND SYNCHRONISATION
LEVERS INCLUDED IN THE SET




ITEM NO.
008911


SYNCHRONISATION ROD FOR KB 1200 WITH S16 FOR
CUTTING LENGTH




KB	ITEM NO.
1200	008912

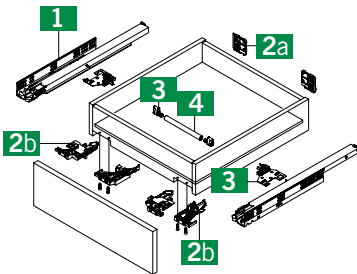

4-SIDED DRAWER

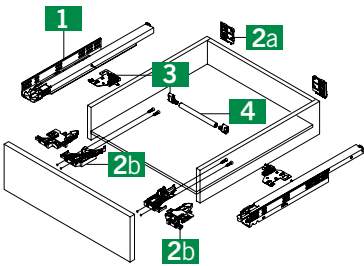

3-SIDED DRAWER




INSET DRAWER




INSTALLATION INFORMATION
INSTALLATION DIMENSIONS

GRASS DYNAPRO FULL EXTENSION DRAWER TIPMATIC 40KG


All dimensions in millimetres

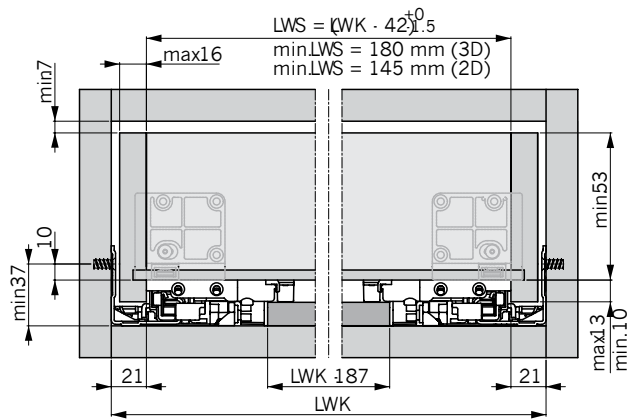


DRAWER




INSET DRAWER




SYNCHRONISATION ROD
CUTTING DIMENSION




LOCKING DEVICE FIXING POSITION

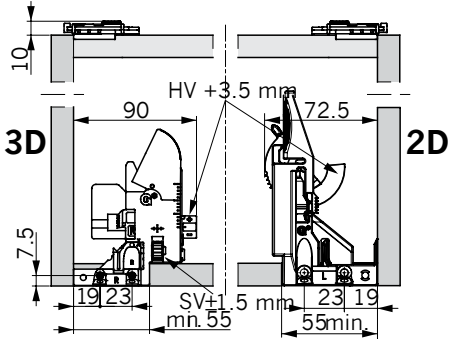


ADJUSTMENT ADAPTER
FIXING POSITION

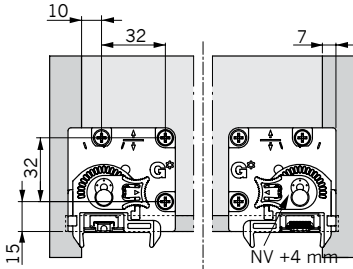


POSITION OF THE SYNCHRONISATION ROD

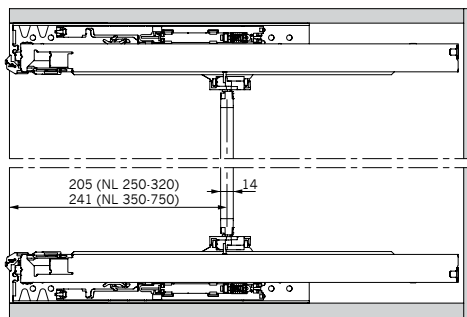

FIXING POSITIONS FOR FULL EXTENSION DRAWER

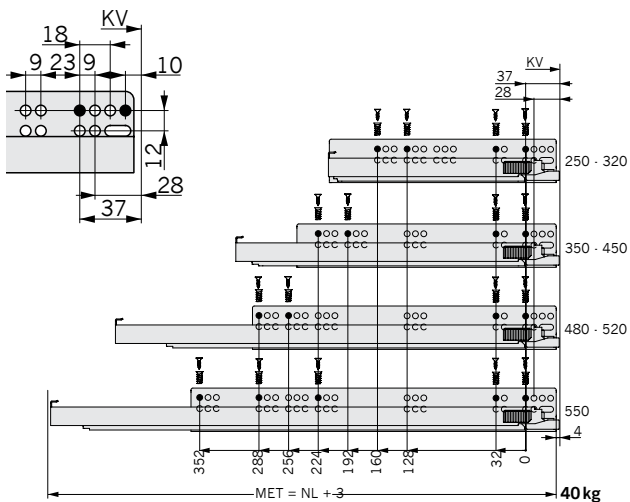




EURO SCREW Ø 6.3 X 14 MM
CHIPBOARD SCREW Ø 4 X 16 MM
SCREW HEAD Ø 7MM

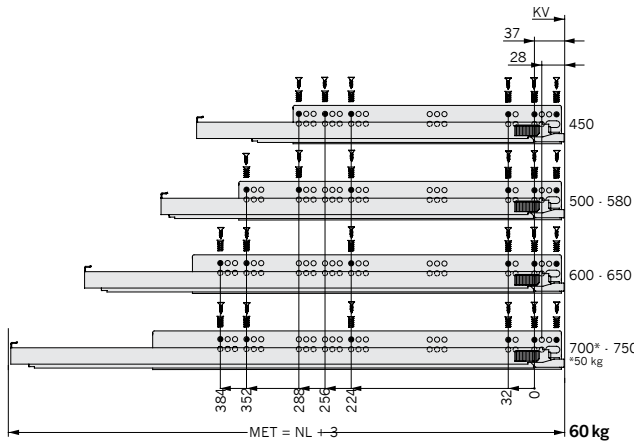

NL	SKL	MET
250	240	253
270	260	273
300	290	303
320	310	323
350	340	353
380	370	383
400	390	403
420	410	423
450	440	453
480	470	483
500	490	503
520	510	523
550	540	553
580	570	583
600	590	603
650	640	653
700	690	703
750	740	753

LEGEND	
HV	Height adjustment
KV	Front edge of cabinet
LWK	Inside cabinet width
LWS	Internal drawer width
MET	Minimum installation depth
NL	Nominal length
NV	Tilt angle adjustment
SKL	Length of drawer
SV	Side adjustment

NOTES

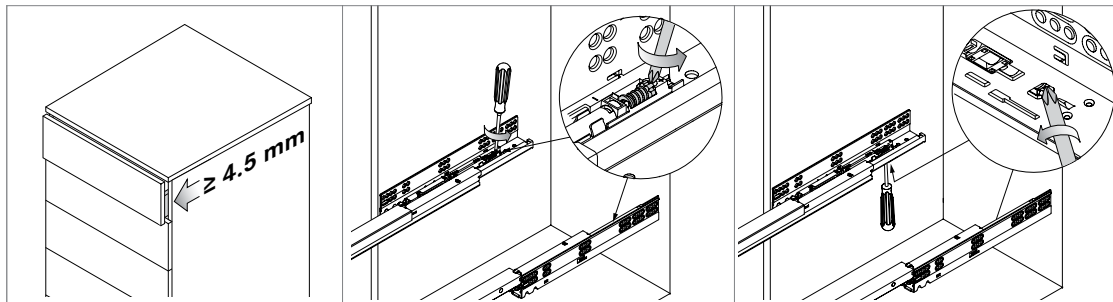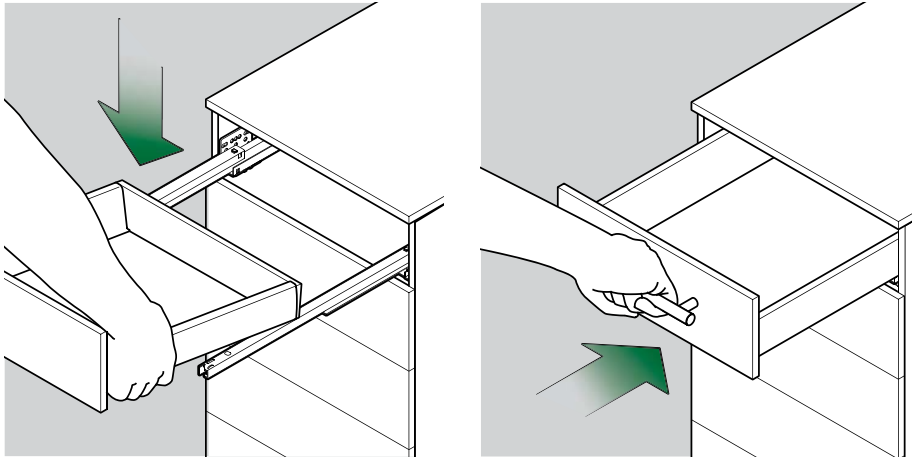


- The screw recommendations are guide values only. Assemblers must ensure that the substrate material is thick enough.




ADJUSTMENT

NOTES


HEIGHT ADJUSTMENT
(MAX. +3.5 MM)




SIDE ADJUSTMENT
(MAX. ±1.5 MM)




TILT ANGLE ADJUSTMENT
OF FRONT
(MAX. +4.0 MM)




DYNAPRO SOFT-CLOSE



DYNAPRO SOFT-CLOSE

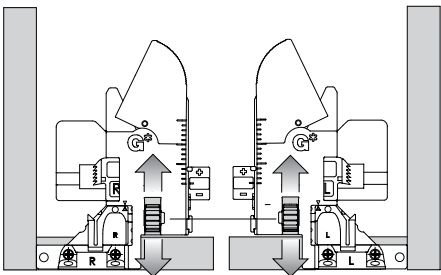

DYNAPRO SOFT-CLOSE



DRAWER SLIDES – GRASS

GRASS DYNAMOOV FULL EXT. DRAWER SOFT-CLOSE 30KG

DYNAMOOV FULL EXTENSION DRAWER SOFT-CLOSE 30KG

- Full extension drawer, synchronised 30 kg load capacity
- Soft-close damping system
- Stepless self-locking of the drawer when placed on the slide
- Integrated height adjustment without tools + 3.5 mm

1

DYNAMOOV SOFT-CLOSE
FULL EXTENSION DRAWER,
30KG

2

LOCKING DEVICE SET,
LEFT/RIGHT






NL	ITEM NO.
350	F130101104204
400	F130101106204
450	F130101108204
500	F130101110204
550	F130101112204

ITEM NO.
F134101220517


G*GRASS®

NOTES

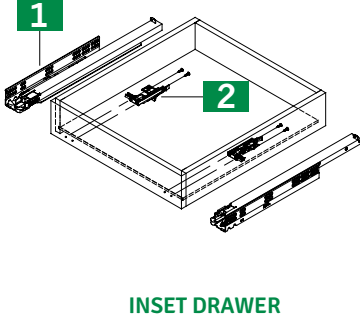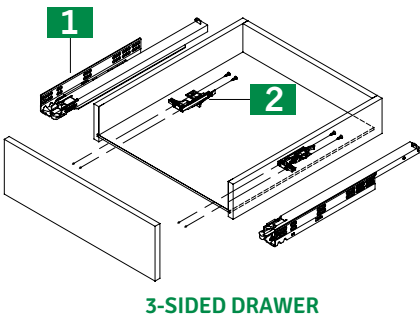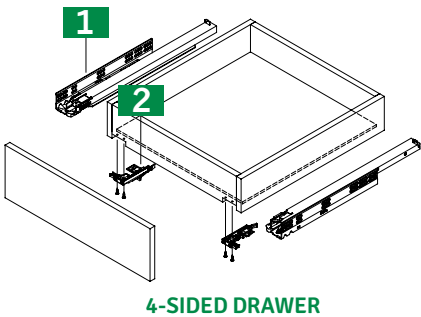





INSTALLATION INFORMATION
DRAWER INSTALLATION DIMENSIONS

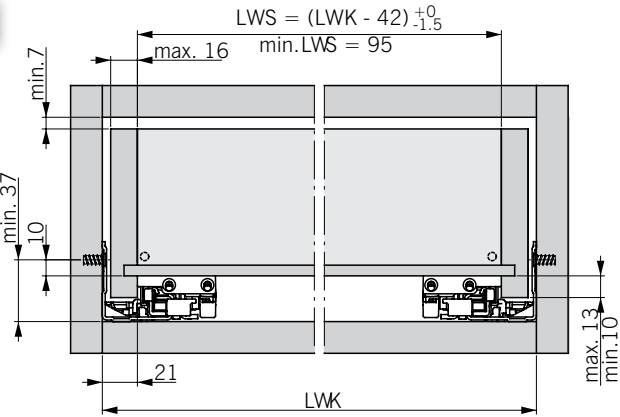


DRAWER




÷ DRAWER



LOCKING DEVICE FIXING POSITION



BACK PANEL HOLE




All dimensions in millimetres

NL	SKL	MET
270	260	273
300	290	303
350	340	353
400	390	403
450	440	453
500	490	503
550	540	553

LEGEND

HV	Height adjustment
KV	Front edge of cabinet
LWK	Inside cabinet width
LWS	Internal drawer width
MET	Minimum installation depth
NL	Nominal length
SKL	Length of drawer

FIXING POSITIONS FOR FULL EXTENSION DRAWER SLIDES

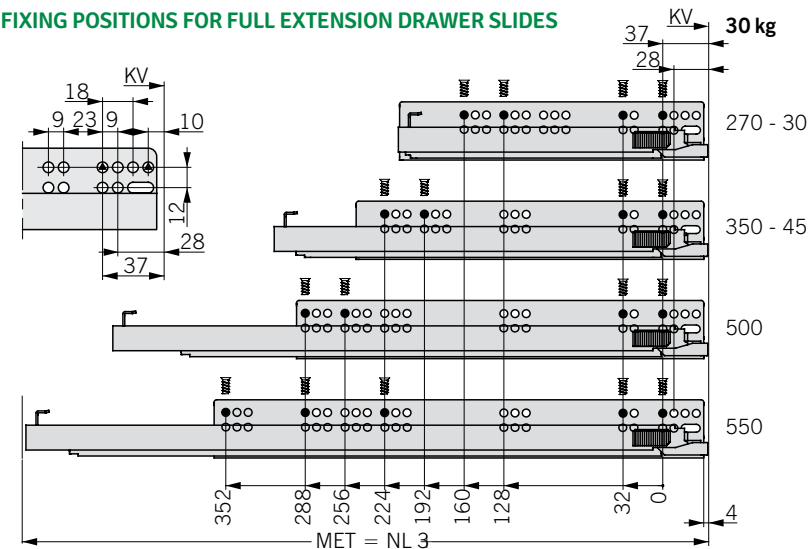

SPECIAL EURO SCREW $\varnothing 6.3 \times 14$ MM
CHIPBOARD SCREW $\varnothing 3.5 \times 15$ MM